

VP 1 52×406

1. STEEL LITE FRAMES	
Туре	SELF-ATTACHING & VANDAL-PROOF Design
Component	<u>Frame A & B</u> Tight mitered corners, no visible welds, countersunk mounting holes
Material	Steel Cold Formed Profiles, T= 1.2mm
Door Cutout	152 * 406mm (ORDER SIZE)
Frame O.D.	173 * 427mm
Screws	Sheet Metal Screws; Stainless Steel; M4*50mm (Std.) 6 pcs
2. GLASS	
Glass Size	123 * 377mm [Recommended]
Exposed Size	105 * 359mm
Glass Thk.	6.8mm, 10.8mm, 32mm (As Recommended)
3. INSTALLATION	Screws fasten the back frame to the front frame thru the door cutout;
Conitor Side DOOR	Leaving corridor side of front frame free of fasteners; Screw Screw Screw Screw - Single side mounting for non-corridor exposure w/fastening screws included;
4. FIRE RATING	
5. APPLICATION	Doors with Frames and Glass not only provide light to a room, they ensure safety;



Door & Glass

[Recommend]

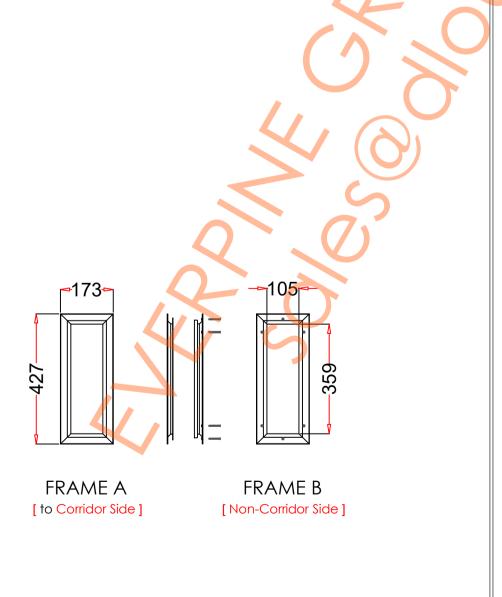



Frame Drawing