

## VP254X254

1. STEEL LITE FRAMES	
Туре	SELF-ATTACHING & VANDAL-PROOF Design
Component	Frame A & B Tight mitered corners, no visible welds, countersunk mounting holes
Material	Steel Cold Formed Profiles, T= 1.2mm
Door Cutout	254 * 254mm ( ORDER SIZE )
Frame O.D.	275 * 275mm
Screws	Sheet Metal Screws; Stainless Steel; M4*50mm (Std.) 8 pcs
2. GLASS	
Glass Size	225 * 225mm [Recommended]
Exposed Size	207 * 207mm
Glass Thk.	6.8mm, 10.8mm, 32mm (As Recommended)
3. INSTALLATION	Screws fasten the back frame to the front frame thru the door cutout;
Contor side	Class     Front Frome B     Behind Frome B     Screw     Seculing Strip 1 Tape     Seculing Strip 1 Tape     Seculing Strip 1 Tape     Single side mounting for non-corridor exposure w/fastening screws included;
4. FIRE RATING	
5. APPLICATION	Doors with Frames and Glass not only provide light to a room, they ensure safety;



Door & Glass

[Recommend]

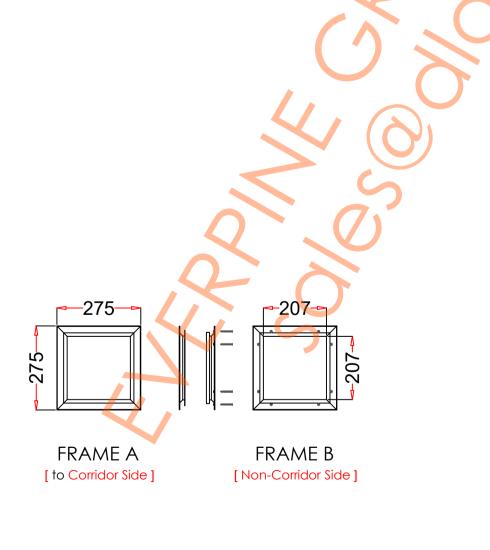



Frame Drawing