

# VP 254x1524

## 1. STEEL LITE FRAMES


Type	SELF-ATTACHING & VANDAL-PROOF Design
Component	Frame A & B Tight mitered corners, no visible welds, countersunk mounting holes
Material	Steel Cold Formed Profiles, T= 1.2mm
Door Cutout	254 * 1524mm ( ORDER SIZE )
Frame O.D.	275 * 1545mm
Screws	Sheet Metal Screws; Stainless Steel; M4*50mm (Std.) 14 pcs

## 2. GLASS

Glass Size	225 * 1495mm [ Recommended ]
Exposed Size	207 * 1477mm
Glass Thk.	6.8mm, 10.8mm, 32mm (As Recommended)

## 3. INSTALLATION

Screws fasten the back frame to the front frame thru the door cutout;

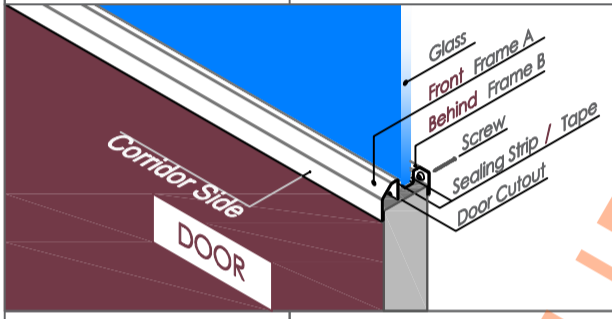


- Leaving corridor side of front frame free of fasteners;
- Single side mounting for non-corridor exposure w/ fastening screws included;


## 4. FIRE RATING

## 5. APPLICATION

Doors with Frames and Glass not only provide light to a room, they ensure safety;

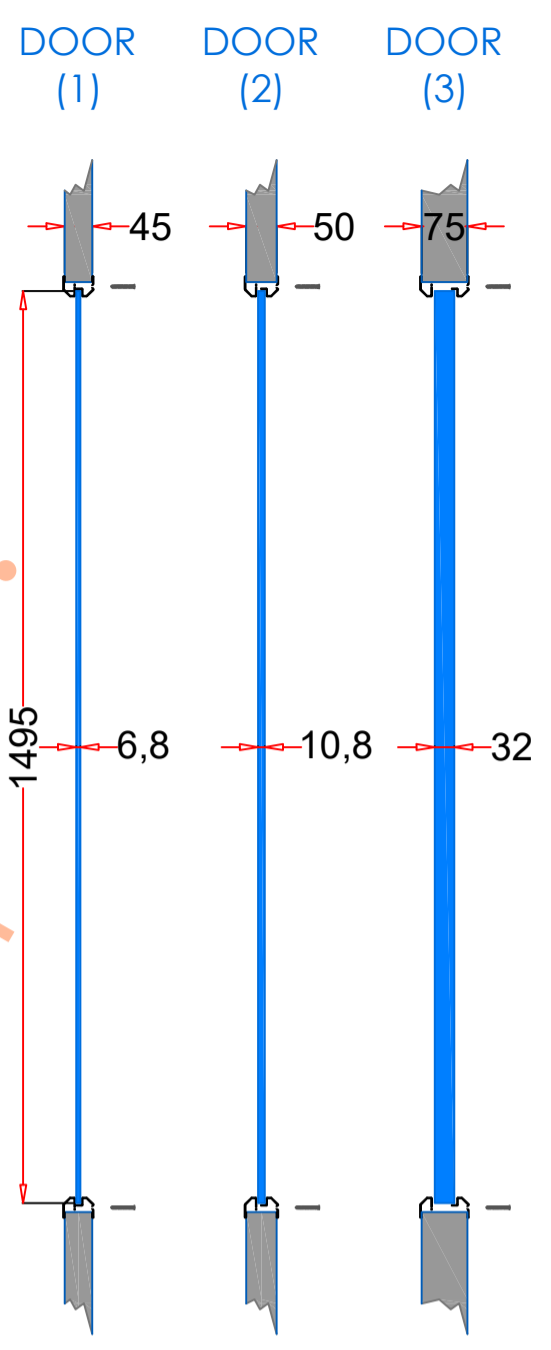

Door & Glass [ Recommend ]

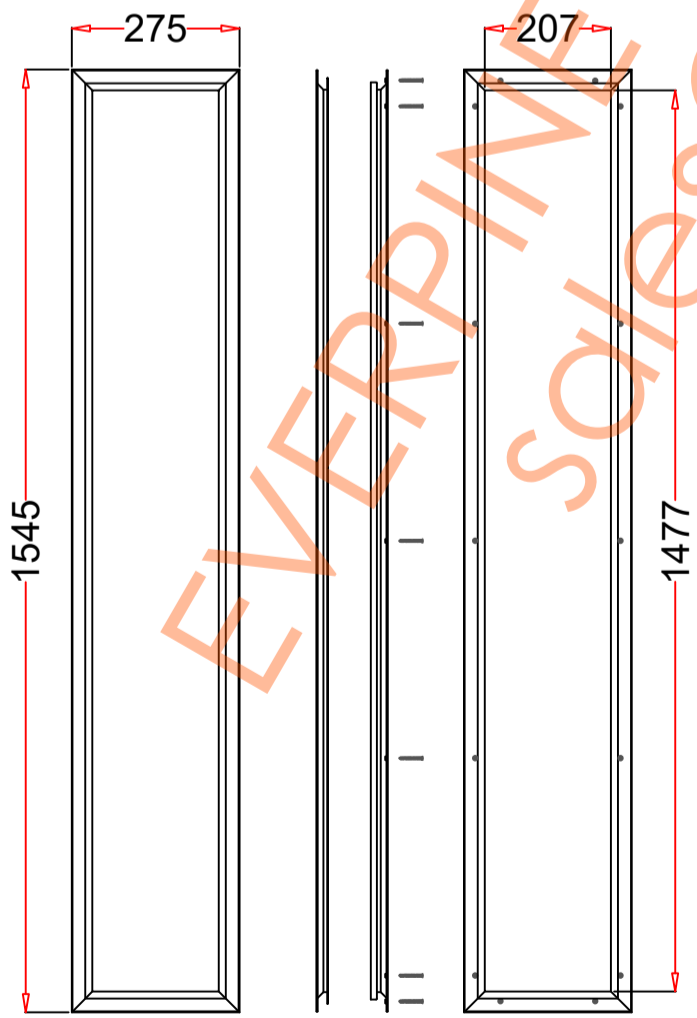

FRAME A [ to Corridor Side ]  
FRAME B [ Non-Corridor Side ]

Frame Drawing



Door Cutout