
## VP305×305

1. STEEL LITE FRAMES	
Туре	SELF-ATTACHING & VANDAL-PROOF Design
Component	Frame A & B Tight mitered corners, no visible welds, countersunk mounting holes
Material	Steel Cold Formed Profiles, T= 1.2mm
Door Cutout	305 * 305mm ( ORDER SIZE )
Frame O.D.	326 * 326mm
Screws	Sheet Metal Screws; Stainless Steel; M4*50mm (Std.) 8 pcs
2. GLASS	
Glass Size	276 * 276mm [Recommended]
Exposed Size	258 * 258mm
Glass Thk.	6.8mm, 10.8mm, 32mm (As Recommended)
3. INSTALLATION	Screws fasten the back frame to the front frame thru the door cutout;
Colors Front Front Front B Benind Front Screw Sealing Strip Single side mounting for non-corridor exposure w/ fastening screws included;  4. FIRE RATING	
	Doors with Frames and Glass not only provide light to a room,
5. APPLICATION	they ensure safety;

Door & Glass

[Recommend]



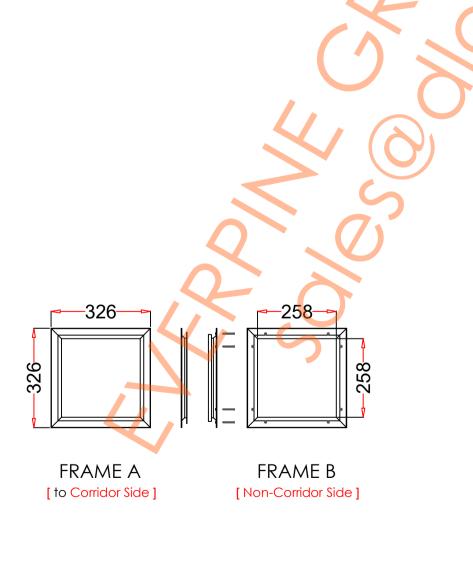

Frame Drawing