



VP 559X1676

1. STEEL LITE FRAMES	
Type	SELF-ATTACHING & VANDAL-PROOF Design
Component	FRONT Frame & BACK Frame Tight mitered corners, no visible welds, countersunk mounting holes
Material	Steel Cold Formed Profiles, T= 1.2mm
Door Cutout	559 * 1676mm (ORDER SIZE)
Frame O.D.	580 * 1647mm
Screws	Sheet Metal Screws; Stainless Steel; M4*50mm (Std.) 16 pcs
2. GLASS	
Glass Size	530 * 1647mm [Recommended]
Exposed Size	512 * 1629mm
Glass Thk.	6.8mm, 10.8mm, 32mm (As Recommended)
3. INSTALLATION	
Screws fasten the back frame to the front frame thru the door cutout;	
 <ul style="list-style-type: none"> • Leaving corridor side of front frame free of fasteners; • Single side mounting for non-corridor exposure w/ fastening screws included; 	
4. FIRE RATING	
5. USAGE	
Doors with Frames and Glass not only provide light to a room, they ensure safety;	

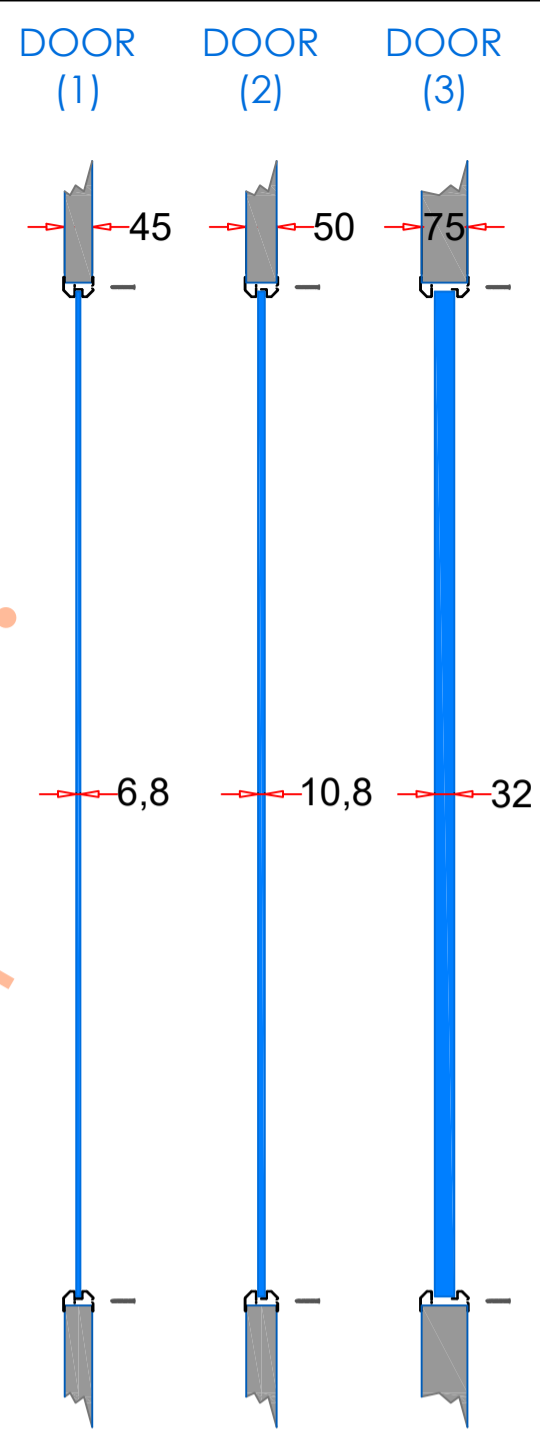

Door & Glass [Recommend]

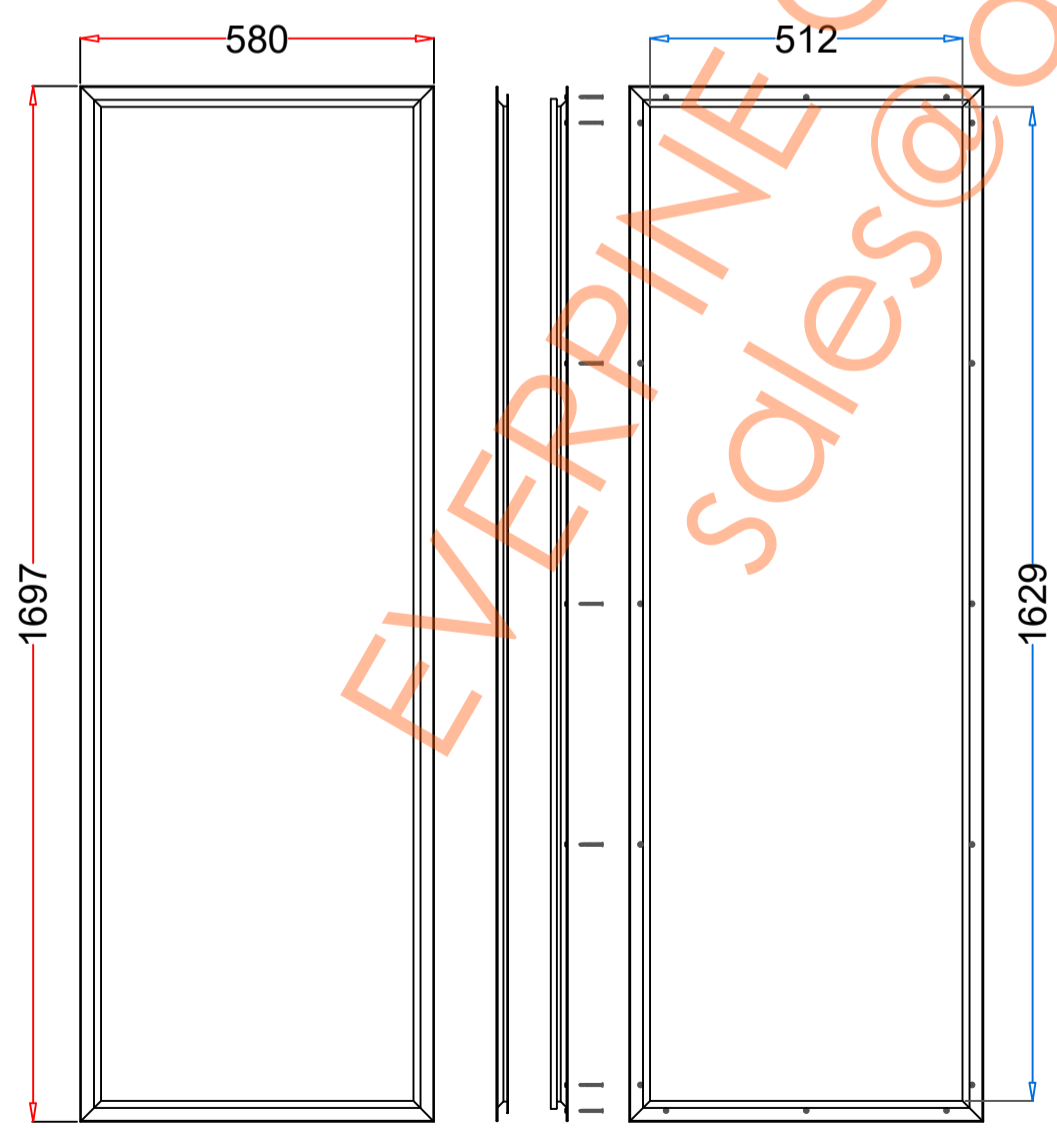

Frame A [Door's Exterior Side]

Frame B [Door's Interior Side]

Frame Drawing



Door Cutout